



Kyocera Technology

› PRINT › COPY › COLOR SCAN

CS 13600 Series

BLACK & WHITE
PRODUCTION SYSTEMS



STREAMLINE,
AUTOMATE,
PROFIT...WITH
PRODUCTION PRINT.



Kyocera Technology

CS 13600 / 11100 / 9600

SPEED, ECONOMY AND VERSATILITY... THAT GOES THE DISTANCE.

The Copystar CS 13600 Series are advanced 136-ppm/111-ppm/96-ppm black-and-white production systems that bring affordable digital imaging to demanding print environments. This advanced series combines best-in-class print, copy and color scan capabilities with a wide range of production-level peripherals. A robust, highly-scalable platform, the CS 13600 Series enables print service providers to increase operational efficiency and measurably boost business performance.

Optimized for volumes of up to 1,000,000 impressions per month, the user-friendly CS 13600 Series offers broad cut-sheet media support, versatile paper handling and professional in-line finishing. Eliminate costly

outsourcing, upgrade legacy systems, add print capacity and expand client offerings. Versatile software and walk-up controls are at your disposal. Create striking manuals, sales collaterals, direct mail, reports and catalogs. Copy and scan with ease using the customizable Color Touch Screen Interface (TSI), with time-saving shortcuts.

Added highlights of the CS 13600 Series include a powerful embedded print controller, high-yield consumables and easy maintenance. This truly exceptional series leverages state-of-the-art technology to deliver consistent, high-quality results that customers want, while offering print providers the higher-profit revenue streams they need.

Our Customers:

- Commercial Printers
- Digital Printers
- Print-for-Pay Shops
- In-Plant CRDs
- Data Centers
- Educational Institutions
- Corporations
- Government



MINIMIZE BOTTLENECKS. SPEED & WORKFLOW VERSATILITY.

Tight deadlines? The CS 13600 Series wastes no time, with print speeds up to 136 pages per minute. Productivity doesn't stop there. The 220-sheet Dual Scan Document Processor (DSDP) efficiently handles duplex copy/scan jobs in a single pass, at an astonishing 220 images per minute. Send scanned documents to virtually any destination – email, folder, PDF, FTP, etc. Scan-to and print-from a USB flash drive or SD card via the easily-accessible ports on the TSI.*

TAP NEW REVENUE SOURCES. MEDIA HANDLING FLEXIBILITY.

From plain paper to letterhead, the CS 13600 Series handles it all...sizes up to 13" x 19.2", weights up to 130 lb. Cover (350gsm). For added paper handling flexibility, the optional 4,400-sheet Vacuum Feed Large Capacity Tray and 550-sheet Multipurpose Tray accept specialty stocks – thin, thick, NCR, textured and heavy-coated substrates, along with envelopes and forms. To add custom paper sizes, including uncoated book covers and long media, up to 13" x 27.5", there's the optional Multipurpose Oversized Media Tray. Such wide media latitude means more profitable business opportunities, as you add valuable service offerings to your portfolio.

ADAPT CAPACITY TO YOUR NEEDS. CONFIGURATION FLEXIBILITY.

Three standard paper trays support a large in-line paper supply of 3,300 sheets for long job runs. Increase paper capacity up to 12,650 sheets to further extend operation time and minimize operator intervention. Optional High Capacity Stackers, up to two per system, hold up to 5,000 sheets each; one roll-away cart is included for easy document transfer to near-line finishing, packing and shipping. With the CS 13600 Series, a configuration can be tailored to maximize system capacity and shop productivity.

STAND OUT FROM THE CROWD. HIGH-PRECISION IMAGING.

Amazing 1200 x 4800 dpi print resolution ensures a professional polish is applied to every job. Enhanced toner composition, with smooth halftones and fine gradations, optimizes text, graphics and images, enabling the CS 13600 Series to produce offset-quality brochures, books, postcards and flyers. For added visual impact and value, the optional Cover Interposer automatically inserts pre-printed sheets.

FAST-TRACK JOB SET UP. SIMPLE USER INTERFACE.

The 10.4" Color Touch Screen Interface (TSI) is mounted on an adjustable arm for comfortable viewing. For fast job turnaround, access intuitive presets, animated guidance and simplified screens. Each authenticated operator has their own Home screen, with functions of their choosing, enabling quick and efficient job set up and workflow management.

**Feature can be enabled/disabled.*



TAKE PRODUCTIVITY TO NEW HEIGHTS.

The CS 13600 Series is yours to design, with a host of ultra-reliable accessories that instantly expand your application range – from simple to complex.

1 **Booklet Finisher (Option):**

This 2,500-Sheet Finisher enables you to produce stapled and saddle-stitched books in-house – a cost-effective alternative to outsourcing.

Staple Finisher (Option not shown):

Get the job done with the 3,000-Sheet Staple Finisher. Staple up to 100 sheets, up to 13" x 19.2".

2 **High Capacity Stacker (Option):**

Maximize end-to-end efficiency with up to two 5,000-sheet Stackers. For confidential documents, lock the Stacker door. When ready, transfer using the roll-away cart (included), for off-line finishing.

3 **Multi-Folding Unit (Option):**

Supports coated stocks to create a wide variety of finished documents. Automatically folds pages in one of six different patterns, including Half-Fold, Letter Fold-In, Letter Fold-Out, Z-Fold, Gate-Fold, and Double Parallel.

4 **Cover Interposer (Option):**

Merges pre-printed inserts, e.g., color front and back covers, into black-and-white workflows.

5 **Standard Dual Scan Document Processor (DSDP) & Platen Glass:**

For effortless copying and scanning, place up to 220 sheets in the high-speed, 220 images-per-minute DSDP. Both the DSDP and Platen Glass hold originals up to Ledger-size (11" x 17").

6 **CS 13600 Series Mainframe:**

A substantial, 3,300-sheet standard paper supply is comprised of one tandem 2 x 1,100-sheet Paper Tray (Tray 1) and two 550-Sheet Paper Trays (Trays 2 and 3). Optional paper sources increase throughput up to 12,650 sheets.

A3 / 11" x 17" Tray Unit for Mainframe (Option not shown):

Converts Tray 1 from Letter-size (8.5" x 11") to Ledger-size (11" x 17") and holds up to 1,000 sheets.



7 Key Operator Call Light:
Easily monitor system status. A low paper or toner condition can be promptly resolved, on-the-fly, ensuring uninterrupted workflow.

8 Color Touch Screen Interface (TSI):
Quickly transition from one job to the next via the 10.4", full-color TSI.

9 Multipurpose Tray (Option):
This 550-sheet Tray holds specialty media up to 13" x 19.2" (14 lb. Bond – 80 lb. Cover).
500-Sheet Multipurpose Oversized Media Tray (Option not shown):
For added media flexibility, this extension to the MPT handles uncoated stocks up to 13" x 27.5".


10 Vacuum Feed Large Capacity Tray – Ledger (Option)*:
Ideal for heavy-coated and textured media, this option holds up to 4,400 sheets, up to 13" x 19.2" (11 lb. Bond – 130 lb. Cover; 40 – 350gsm), enabling you to offer high-value deliverables to your customers.

11 Air-Assist Large Capacity Tray – Ledger (Option)*:
For greater productivity, this tray adds 4,400 sheets of in-line paper capacity, up to 13" x 19.2" (11 lb. Bond – 110 lb. Cover).
Large Capacity Tray – Letter (Option not shown):
Perfect for long Letter-size (8.5" x 11") job runs, this tray holds up to 5,000 sheets (14 lb. Bond, up to 80 lb. Cover).

Optional Accessories:

- **Hole Punch Unit** - Finisher option that automatically punches 2/3 holes, at rated engine speed.
- **Decurl Unit** – For reliable paper stacking, smooths convexity and concavity curls prior to output.
- **Booklet Trimmer Unit** – Attaches to 2,500-sheet **Booklet Finisher (option)** and trims booklet facing edge.

Note: Two Vacuum Feed LCTs or a Vacuum Feed LCT and an Air-Assist LCT can be installed on one system, connected via the **Bridge Unit (option).*

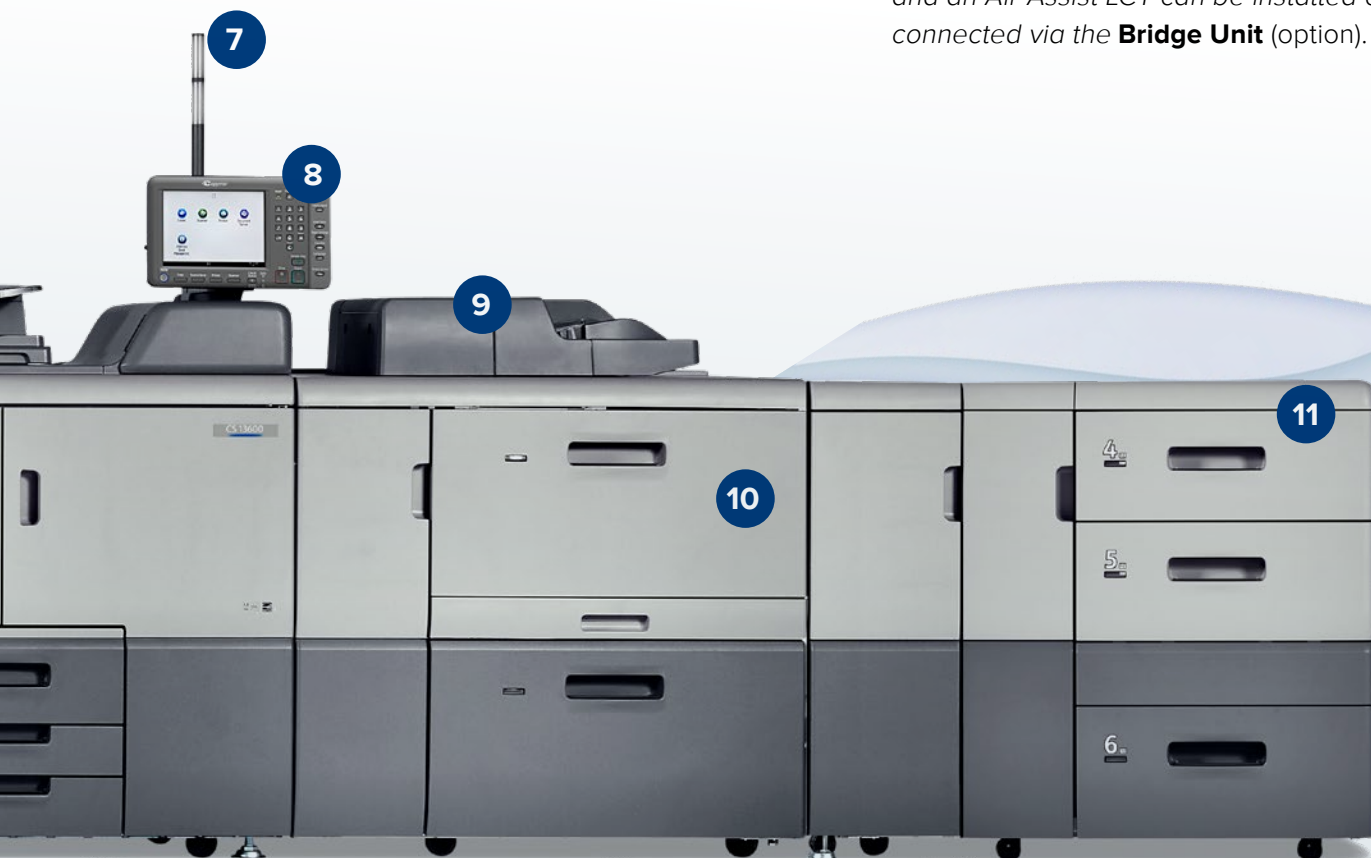

BE READY TO ROLL. FINISHING WITH A FLARE.

Produce distribution-ready manuals, meeting handouts and more, with the 3,000-sheet Finisher, with 100-sheet multi-position stapling. The 2,500-Sheet Booklet Finisher supports 100-sheet stapling and 20-sheet saddle stitch booklet making (up to 80-page booklets). To further automate end-to-end workflow, add optional hole punching, multi-folding, booklet trimming, decurling and high-capacity stacking units.

NEVER MISS A BEAT. REPLENISH SUPPLIES, ON THE FLY.



Replace paper and toner while jobs are in progress. Active Tray LEDs indicate which trays are in use; idle trays can be safely refilled. From the elevated Key Operator Call Light, easily monitor system status at a distance; low paper or toner conditions can be promptly addressed. Trained Customer Replaceable Units (TCRU) enable operators to swap out typical maintenance components, without the need for a service technician.

STRUCTURE WORKFLOW. FAST, EFFICIENT THROUGHPUT.



The standard embedded 1.86GHz, 2 GB Print Controller integrates with virtually any host environment, for seamless, intuitive workflow. Enhance print job assembly and management capabilities with the optional EFI Fiery EB-34 Print Controller. This 2.9GHz, 4 GB External Server further streamlines job management and preparation tasks. Offering reliable speed and performance, the EB-34 Print Controller provides another path to top-quality, high-value print production.

PROTECT ASSETS. IMPROVE COMPLIANCE & ACCOUNTABILITY.

Security in high-volume environments is always a concern, particularly where throughput includes annual reports, client statements, healthcare records, insurance policies, etc. To mitigate risk to information security, operators can be required to authenticate before accessing device features. Locked Print holds print jobs in memory, until released by the operator (with valid password) at the control panel. Secure Sockets Layer/Secure Transport Layer (SSL/STL) technology encrypts all data that traverses the network. When using the High Capacity Stacker option, the Stacker door can be locked.

LOWER RUNNING COSTS. CONSERVE ENERGY.

Operators have full control over the CS 13600 Series' power and energy settings. The system turns on/off as needed, reduces energy requirements during off-peak times and shifts into sleep mode under specified conditions. Completely automatic, these settings help reduce environmental impact and lower total cost of ownership.



PAPER SUPPLY

Standard Paper Sources: Dual 1,100 Sheet Tandem Tray (**Tray 1**), Two - 550 Sheet Trays (**Trays 2 & 3**)
Paper Size Tray 1: 8.5" x 11"
Paper Size Trays 2 & 3: 5.5" x 8.5" – 12" x 18"
Paper Weight Trays 1-3: 14 lb Bond - 95 lb Cover (52 – 256 gsm)
Paper Capacity: Standard: 3,300 Sheets; Maximum: 12,650 Sheets
Input Media Types: Plain, Recycled, Colored, Letterhead, Preprinted, Prepunched, Bond, Card, OHP, Tab, Label, Gloss, Matte, Envelope, and NCR

OPTIONAL PAPER SOURCES

TK5010' Ledger Tray Unit

Paper Capacity: 1,000 Sheets
Paper Size: Up to 11" x 17"
Dimensions: 19.5" W x 20.9" D x 6.9" H
Weight: 22 lbs

BY5010 Multipurpose Tray

Paper Capacity: 550 Sheets
Paper Size: 5.5" x 8.5" – 13" x 19.2"
Paper Weight: 14 lb Bond – 80 lb Cover (52 – 216gsm)
Dimensions: 27.2" W x 22.1" D x 8.3" H
Weight: 44 lbs

Multipurpose Oversized Media Tray²

Paper Capacity: 500 Sheets
Paper Size: 5.5" x 8.5" – 13" x 19.2"
Custom Size: 3.94" x 5.5" – 13" x 27.5"
Paper Weight: 14 lb Bond – 80 lb Cover (52 – 216gsm)
Dimensions: 42.9" W x 22.1" D x 8.3" H when attached to the

BY5010 Multipurpose Tray

Weight: 20.9 lbs

RT5070³ Letter Large Capacity Tray (LCT)

Paper Capacity: 5,000 Sheets (Trays 4 & 5: 1,100 Sheets; **Tray 6:** 2,800 Sheets)
Paper Size: 5.5" x 8.5" – 8.5" x 11"
Paper Weights Trays 4 & 5: 14 lb Bond – 80 lb Cover (52 – 216gsm)
Paper Weights Tray 6: 14 lb Bond – 60 lb Cover (52 – 163gsm)
Dimensions: 21.3" W x 28.7" D x 39.4" H
Weight: 233.2 lbs

RT5080⁴ Ledger Large Capacity Tray (LCT)

Paper Capacity: 4,400 Sheets (**Trays 4 & 6 or 6 & 8:** 1,100 Sheets; **Tray 5 or 7:** 2,200 Sheets)
Paper Size: 5.5" x 8.5" – 13" x 19.2"
Paper Weight Trays 4-6 or 6-8: 11 lb Bond – 110 lb Cover (40 – 300gsm)
Dimensions: 34" W x 28.7" D x 39.4" H
Weight: 407 lbs

RT5100⁵ Vacuum Feed Large Capacity Tray (LCT)

Paper Capacity: 4,400 Sheets (**Trays 4 & 5 and/or 6 & 7:** 2,200 Sheets)
Paper Size: 5.5" x 8.5" – 13" x 19.2"
Paper Weight Trays 4 & 5 and/or 6 & 7: 11 lb Bond – 130 lb Cover (40 – 350gsm)
Power Requirement: 100-127V
Power Consumption: Less than 860W
Dimensions: 41.5" W x 28.7" D x 39.4" H
Weight: Less than 484 lbs

BU5010⁶ Bridge Unit for RT5100 Vacuum Feed LCT

Paper Size Width: 3.94" – 13"
Paper Size Length: 5.5" x 19.2"
Paper Weight: 11 lb Bond – 130 lb Cover (40 – 350gsm)
Power Source: From LCT RT5100
Dimensions: 13" W x 28.7" D x 39.4" H
Weight: Less than 132 lbs

SECURITY SPECIFICATIONS

Security Features: Data Encryption (Address Book, Authentication Password, SSL Communication, S/MIME, IPsec Communication, HDD), User Authentication (Windows®, LDAP, Basic, User Code, 802.1x Wired), Network Protocol On/Off, Mask Type for Data Security, Data Security Unit Option, IP Filtering, Unauthorized Copy/Print Control, Quota Setting, SMTP over SSL, Mandatory Security Information Print (Compulsory Security Stamp)

UTILITIES

XG-SD, Gloria-P, Gloria-A, Gloria-AP, Gloria-FS, Maple, Karachi, RIS, Forest, UZ-D1, Basil, UZ-A1, Lime, Birdie-D, Birdie-S, Ibis, MDS Tool V1.0, Mebius, eDC-i1, Client Activator, Endpoint, Green Calculator, UZ-S1, Camelot, Info Print Manager

PRINT SPECIFICATIONS

Standard Controller: Intel® Celeron® Processor P4505 / 1.86 GHz
PDLs / Emulations: Standard: PCL6, PCL5e, PDF; Optional: Adobe PostScript 3, Genuine IPDS
Print Resolution: Up to 1200 x 4800 dpi
Fonts: Standard: PCL: 45 fonts, 13 International fonts; Optional: PS3: 136 fonts; IPDS: 108 fonts
OS Compatibility: Windows: Vista/7/8/8.1/10/Server, 2008/2008 R2/2012/2012 R2; Unix: Sun Solaris, HP-UX, SCO Open Server,

RedHat Linux; IBM AIX; Citrix Presentation Server 4.5/Citrix XenApp 5.0; Mac OS X v.10.2 or later; SAP R/3; NDPS Gateway; IBM iSeries/AS/400-using OS/400 Host Print Transform
Interfaces: Ethernet (1000BASE-T/100BASE-TX/10BASE-TX); Type A: USB 2.0 x 3; Type B: SD Slot
Optional: IEEE1284/ECP
Network Print and Supported Protocols: **Standard:** TCP/IP (IPv4, IPv6); IPX/SPX
Drivers: Standard: PCL5e, PCL6 (XL), PDF, XPS, RGPL/GL2, PCL6 (XL) Universal Driver; Optional: Adobe PS3, Adobe PS3 Universal Driver, IPDS

COPY SPECIFICATIONS

Copy Resolution: Up to 1200 x 4800 dpi
Copy Features: Duplex, Simplified Display, Auto Paper Selection, Auto Reduce/Enlarge, Auto Start, Auto Tray Switching, Auto Image Density, User Codes (1,000), Job Programs (25), Electronic Sort/Stack, Image Rotation, Interrupt Copy, User Tools, Job Presets, Book/Series/Combine Copying, Cover/Chapter/Slip Sheet, Tabs, Sample Copy, Stamps/Numbering, Bates Numbering, Shift/Erase/Margin Adjustment, Customizable Home Screen, Import/Export of Preference Settings, Eco-Friendly Indicator, Power On/Off Timer, Energy Saver, Weekly Timer, External USB Keyboard Support, MFP Browser for Web Image Monitor, Copy Reservation (8), A3/DLT Counter, Mixed Originals/Batch Mode

SCAN SPECIFICATIONS

Scan Type: Color and Black & White Scanner
Scan Resolution: Up to 600 dpi (TWIN: 1200 dpi)
File Formats: Single Page: TIFF/JPEG/PDF/High Compression PDF; Multi-Page: TIFF/PDF/High Compression PDF
Scan Speeds (B&W/color @200/300 dpi): Simplex: 120 ipm B&W / Color; Duplex: 220 ipm B&W / Color
Connectivity / Supported Protocols: Ethernet (1000BASE-T/100BASE-TX/10BASE-TX); Type A: USB 2.0; Type B: SD Card Slot
Scanning Functions: Scan to USB/SD, WS Scanner, Scan-to Email/Folder/SMB/FTP/URL/NCP/PDF/A/Digitally Signed PDF/ Searchable PDF, TWIN Scanning, Scanned File Naming, LDAP Support, Universal Send, Distributed Scan Management, Preview Before Transmission, PDF Encryption, Drop Out Color Send, B&W/ FC Photo, B&W/FC Text, Auto Color Selection, Auto Density, Auto Size Detection, Image Rotation, Mixed Size/SADF/Batch Mode, Reduce and Enlarge, Split Scan, JBIG2 Compression Support
Original Size: Through DP & On Glass: Up to 11" x 17"

DOCUMENT SERVER SPECIFICATIONS

Maximum Stored Documents: 15,000
Maximum Pages per Document: 1,000
Maximum Stored Pages: 15,000
Folder Management: With password, up to 200 personal folders

STANDARD DOCUMENT PROCESSOR

Type / Capacity: Dual Scan Document Processor (DSDP) / 220 Sheets
Acceptable Originals: Up to 11" x 17"

OPTIONAL 3,000 SHEET STAPLE FINISHER SR5050

Stack Capacity (Proof Tray): 250 Sheets (8.5" x 11" or smaller); 50 Sheets (8.5" x 14" or larger)
Stack Capacity (Shift Tray): 3,000 Sheets (8.5" x 11"); 1,500 Sheets (8.5" x 14" – 11" x 17"); 1,000 Sheets (12" x 18" – 13" x 19.2")
Paper Size: 5.5" x 8.5" – 13" x 19.2"
Paper Weight Proof Tray: 14 lb Bond – 80 lb Cover (52 – 216gsm)
Paper Weight Shift Tray: 11 lb Bond – 130 lb Cover (40 – 350gsm)
Output Jogger: Standard
Staple Capacity: 2 - 100 Sheets (8.5" x 11"); 2 - 50 Sheets (8.5" x 14" – 11" x 17")
Staple Position: Top, Bottom, 2 Staples, Top Slant
Optional Punch: 2 or 3 Holes, Supports 8.5" x 11" – 12" x 18"; 14 lb Bond – 80 lb Cover (52 – 216gsm)
Dimensions: 39.2" W x 28.7" D x 44.3" H
Weight: 246 lbs

OPTIONAL 2,500 SHEET BOOKLET FINISHER SR5060

Stack Capacity (Proof Tray): 250 Sheets (8.5" x 11" or smaller); 50 Sheets (8.5" x 14" or larger)
Stack Capacity (Shift Tray): 2,500 Sheets (8.5" x 11"); 1,500 Sheets (8.5" x 14" – 11" x 17"); 1,000 Sheets (12" x 18" – 13" x 19.2")
Paper Size Proof Tray: 5.5" x 8.5" – 13" x 19.2"
Paper Size Shift Tray: 5.5" x 5.5" – 13" x 19.2"
Paper Weight Proof Tray: 14 lb Bond – 80 lb Cover (52 – 216gsm)
Paper Weight Shift Tray: 11 lb Bond – 130 lb Cover (40 – 350gsm)
Output Jogger: Standard
Staple Capacity: 2 - 100 Sheets (8.5" x 11"); 2 - 50 Sheets (8.5" x 14" – 11" x 17")
Staple Position: Top, Bottom, 2 Staples, Top Slant
Saddle-Stitch Staple Capacity: 20 Sheets (8.5" x 11" – 13" x 19.2")

Saddle-Stitch Staple Position: Center 2 Position
Optional Punch: 2 or 3 Holes, Supports 8.5" x 11" – 12" x 18"; 14 lb Bond – 80 lb Cover (52 – 216gsm)
Dimensions: 39.2" W x 28.7" D x 44.3" H
Weight: 246 lbs

OPTIONAL BOOKLET TRIMMER TR5040

Trimming Type: One Side Edge
Trimming Capacity: 1 - 20 Sheets (2 - 40 pages after folding)
Paper Size: Up to 13" x 19.2"
Stack Capacity: Up to 60 Sets
Limitless Stack: Yes
Dimensions: 43.9" W x 23.3" D x 21.8" H
Weight: 165 lbs

OPTIONAL HIGH CAPACITY STACKER SK5030⁷

Paper Capacity: 5,000 Sheets; Proof Tray: 250 Sheets
Output Jogger: Standard
Rollaway Cart: Standard (Optional additional carts available)
Power Consumption: Less than 120 W
Power Supply: 120-127V, 50/60Hz, 2A
Dimensions: 35.4" W x 28.7" D x 39.8" H
Weight (Stacker): 264 lbs
Weight (Roll Away Cart): 33 lbs

ADDITIONAL ACCESSORIES

2 Source Cover Interposer CI5030

Paper Size: 5.5" x 8.5" – 13" x 19.2"
Paper Weight: 17 lb Bond – 80 lb Cover (64 – 216gsm)
Stack Capacity: 200 Sheets x 2 Trays
Dimensions: 21.2" W x 28.7" D x 50.8" H
Weight: 99 lbs

Multi-Folding Unit FD5020

Folding Type (Single Sheet Mode): Z-Fold, Half-Fold/Print Inside, Half-Fold/Print Outside, Letter Fold-In/Print Inside, Letter Fold-In/Print Outside, Letter Fold-Out, Double Parallel/Print Inside, Double Parallel/Print Outside, Gate-Fold/Print Inside, Gate-Fold/Print Outside

Folding Type (Multiple Sheets Mode): Half-Fold/Print Inside, Half-Fold/Print Outside, Letter Fold-In/Print Inside, Letter Fold-In/Print Outside, Letter Fold-Out

Paper Size (Single Sheet Mode): 8.5" x 11" – 12" x 18" (Z-Fold); 8.5" x 11" – 13" x 19.2" (Half-Fold); 8.5" x 11" (Letter-Fold)
Paper Size (Multiple Sheets Mode): 8.5" x 11" – 12" x 18" (Double Parallel Fold); 8.5" x 11" – 12" x 18" (Gate-Fold); 8.5" x 11" – 13" x 19.2" (Half-Fold); 8.5" x 11" (Letter Fold-In & Letter Fold-Out)

Dimensions: 18.5" W x 28.7" D x 39.4" H
Weight: 203 lbs

Decurl Unit DU5050

Decurl Function: Three steps pressure adjustment (from operation panel) Paper Weight: 11 lb Bond – 130 lb Cover (40 – 350gsm)
Dimensions: 2.8" W x 20" D x 7.1" H
Weight: 11 lbs

EFI Fiery EB-34 Controller

EFI Platform: FS200 Pro
Configuration: External
Memory: 4 GB
CPU: Intel Processor G850 2.9 GHz
Host Interface Ethernet: 1000/100/10Base-T x 2
Hard Disk Drive: 500 GB
Operating System:

Windows 8.1 Professional For Embedded Systems x64
Network Protocol: TCP/IP (IPv4, IPv6), SMB
Printer Description Language: Adobe PS3, PCL5e, PCL6
Maximum Resolution: 1200 dpi
Fonts: Adobe PS3 138, PCL 81

Standard Operation Panel Utilities Via TSI on MFP:

EFI Driver, Command Workstation, Webtools, Hot Folders
Optional Operation Panel Utilities Via TSI on MFP: Fiery SeeQuence Impose, Fiery SeeQuence Compose, Image Viewer for Black & White, EFI Spectrophotometer (ES-2000), FACI Furniture, External Secure HDD Kit

NOTES:

- 1 Replaces Standard Dual 1,100 Sheet Tandem **Tray 1**.
- 2 Cannot be added with an **RT5070**.
- 3 If an **RT5070** is selected, it can be the only Optional Paper Source added, and only one can be added.
- 4 Only one **RT5080** can be selected, but it can run in tandem with one **RT5100**.
- 5 Up to two **RT5100s** can be selected. One can be selected alone, one can be added with an **RT5080**, or two can be selected.
- 6 A **BU5010** is required if either an **RT5080** and **RT5100** are selected or if two **RT5100s** are selected.
- 7 The **DU5050** is required. Up to two can be selected, and either an **SR5050** or **SR5060** can be added. If **FD5020** is selected, then only one **SK5030** can be added.

ONE SERIES. THREE MODELS.

There are three models in the CS 13600 Series, so you can choose the production system that best meets your speed and volume needs.



	CS 9600	CS 11100	CS 13600
Configuration	Black & White Production Multifunctional System – Print / Copy / Color Scan		
Pages Per Minute (Letter/Legal)	96 ppm	111 ppm	136 ppm
Warm Up Time	360 Seconds or Less (Power On)		
First Page Out (Print/Copy)	6.3 Seconds or Less	5.6 Seconds or Less	4.6 Seconds or Less
Display	10.4" Color TSI		
Resolution	1200 x 4800 dpi		
Memory / Hard Disk Drive	2 GB RAM / 640 GB (320 GB x 2) HDD Standard		
Duplex	Standard Duplex / Inverter Output Supports Statement to 13" x 19.2" (Custom Paper Size), 14 lb Bond – 110 lb Cover (52.3 – 300gsm)		
Electronic Requirements	208-240V, 50/60Hz, 20A (dedicated)		
Typical Electricity Consumption (TEC)	11.9 kWh/week	14.0 kWh/week	17.4 kWh/week
Dimensions	45" W x 35.4" D x 45.1" H		
Weight	937 lbs		
Maximum Monthly Volume	1,000,000 Pages per Month		
Duty Cycle	2,100,000 Pages	2,400,000 Pages	3,000,000 Pages

For full CS 13600 Series spec sheets, please visit www.copystar.com

KYOCERA Document Solutions America, Inc.

225 Sand Road, PO Box 40008, Fairfield, New Jersey 07004-0008, USA

Tel +1.973.808.8444 Support +1.800.255.6482

www.copystar.com

© 2018 KYOCERA Document Solutions America, Inc. All rights reserved.

Specifications are subject to change without notice. Copystar is a trademark of the KYOCERA Companies. Mac OS is a trademark of Apple, Inc. Windows is a trademark of Microsoft Corporation. Intel and Celeron are trademarks of Intel Corporation. EFI Fiery is a trademark of Electronics For Imaging, Inc. All other trademarks are the property of their respective owners.

IC# 855D400687

V081418